


Item# _____
 Project: _____
 Qty: _____

Chrome Wire Shelving



Features

- Load capacity 600-800lbs
- Chrome plated
- Numbered post for easy assembly
- Also available in silver & green epoxy

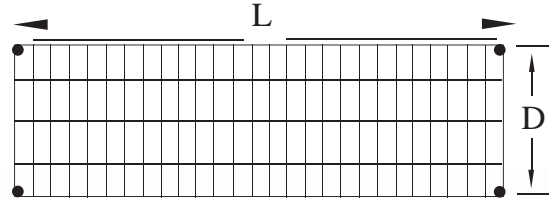

Chrome Post		
Model	Size	Weight
CH34CWP	34"	2
CH54CWP	54"	3
CH63CWP	63"	4
CH74CWP	74"	5
CH86CWP	86"	6



Model	Size (D x L)	Weight/lbs (Shipping)
CH1424CWP	14"x24"	6
Ch1430CWP	14"x30"	7
CH1436CWP	14"x36"	8
CH1442CWP	14"x42"	10
CH1448CWP	14"x48"	11
CH1454CWP	14"x54"	12
CH1460CWP	14"x60"	14
CH1472CWP	14"x72"	18

Model	Size (D x L)	Weight/lbs (Shipping)
CH2124CWP	21"x24"	8
CH2130CWP	21"x30"	9
CH2136CWP	21"x36"	11
CH2142CWP	21"x42"	12
CH2148CWP	21"x48"	14
CH2154CWP	21"x54"	16
CH2160CWP	21"x60"	18
CH2172CWP	21"x72"	24

Model	Size (D x L)	Weight/lbs (Shipping)
CH1824CWP	18"x24"	7
CH1830CWP	18"x30"	8
CH1836CWP	18"x36"	9
CH1842CWP	18"x42"	11
CH1848CWP	18"x48"	12
CH1854CWP	18"x54"	15
CH1860CWP	18"x60"	17
CH1872CWP	18"x72"	20

Model	Size (D x L)	Weight/lbs (Shipping)
CH2424CWP	24"x24"	9
CH2430CWP	24"x30"	11
CH2436CWP	24"x36"	13
CH2442CWP	24"x42"	15
CH2448CWP	24"x48"	16
CH2454CWP	24"x54"	19
CH2460CWP	24"x60"	21
CH2472CWP	24"x72"	26

Cannonware Products
www.cannonware.com

Phone:(800).768.5953

Fax:(800).976.1299



Cannonware Products

Item# _____
Project: _____
Qty: _____

Chrome Wire Shelving

Wire Shelving Specification Sheet

General:

Material: Shelving shall be of the type manufactured by Cannonware Products. It shall carry the approval of the National Sanitation Foundation (NSF).

Finish: Shelves shall be composed of bright basic carbon steel wire. Posts shall be cold rolled carbon steel tubing, electric welded.

Surface preparation of steel to be zinc phosphate, with bright finish chrome plating. One year warranty.

Shelves: Construction shall be of open wire design to offer better visibility, less weight, increased air circulation and minimal accumulation of dust.

Fabrication: Face ribs shall run front to back equally spaced on 13/16" centers and to be of 9 gauge (0.148") wire. All four sides of each shelf shall consist of a corrugated, reinforcing truss of 6 gauge (0.192") wire. At the front and back of the shelf, this corrugated, reinforcing shall be welded to 1/4" (0.250") rib wire running perpendicular and above the face ribs. A 1/4" (0.250") rib shall be welded to the bottom of the truss. At the ends of the shelf, the corrugated reinforcing truss shall be welded to parallel 1/4" (0.250") wire ribs. Depending upon the width and length of the shelf, it shall have three or five longitudinal ribs (0.192" wire) welded to the face ribs. In addition, certain longer lengths shall have one or two corrugated reinforcing trusses (0.192") welded to the underside. At each corner of the shelf there shall be a tapered, conical fitting made of 12 gauge (0.104") cold rolled steel to the parallel rib supports. The fitting shall be designed to accommodate the vertical supports. The corrugated truss shall be in the shape of the letter "V".

Posts: Shall be of 1" O.D. round, cold rolled carbon steel tubing, 16 gauge (0.062") thickness. They shall have rolled grooves spaced at 1" on centers along their length. The top of the post shall have a finished plastic cap and the post bottom shall have a die cast insert threaded with an adjustable leveling foot. Between groove shall be consecutive numbering starting at the bottom of the post to insure accurate alignment of the shelf clips.

Method Of Assembly: Shall be of a tapered conical design implementing a two part tapered plastic clip. Securing of the two part clip shall be accomplished with a protruding bead on the inside of the shelf clip which will match the groove in the post. Two shelf clips shall be attached to each corner post for each shelf. Both the clips and the corner fitting of the shelves shall have a matching taper, creating a wedge-like effect, locking the shelf securely in the desired position. No other hardware shall be required to complete this assembly. Shelves shall be adjustable on 1" vertical increments.

Load Capacity: 600-800 lbs. per shelf evenly distributed, depending upon the size. Maximum load per assembled unit not to exceed 2,000 lbs. without casters.

Packing: Shelves are packed in quantities of 4 per carton, except for 54", 60" and 72" lengths, which are packed in a quantities of 2 per carton. Posts are packed in quantities of 4 per carton.



Cannonware Products
www.cannonware.com

Phone: (800).768.5953

Fax: (800).976.1299

